

Skid-resistant and visually appealing

FUNDERMAX®

Building for the best look

It goes without saying that Max Exterior panels can be used for more than just covering large areas. Various special shapes and milling can be used to also create plank elements—such as those often used in decks and patios.


We are proud to offer such processing services using the most modern CNC equipment. We would be happy to receive your request!



Plank elements with dark wood décor and Hexa surface



Plank elements with light wood décor and Hexa surface

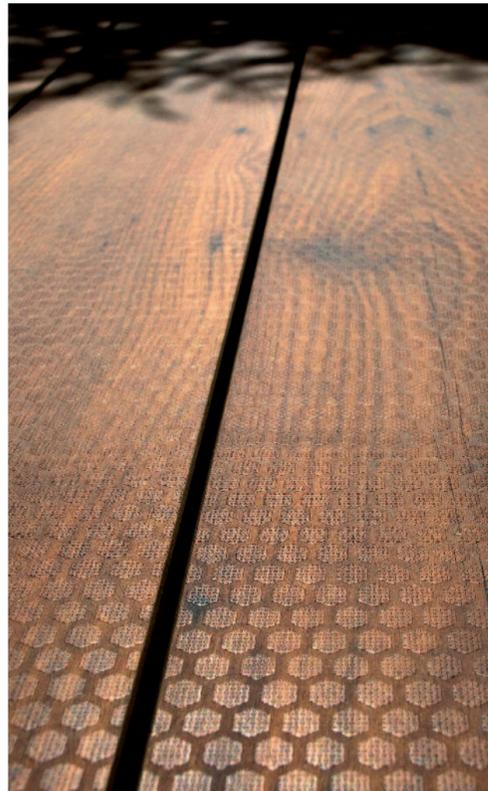

Close-up view of wood decor with Hexa surface

FUNDERMAX®

5-6/10-1227810GB:18

FunderMax France
3 Cours Albert Thomas
F-69003 Lyon
Tel.: +33 (0)4 78 68 28 31
Fax: +33 (0)4 78 85 18 56
infofrance@fundermax.at
www.fundermax.at

FunderMax India Pvt. Ltd.
504, 5th floor, Brigade Towers
135, Brigade Road
IND-560025 Bangalore
Tel.: +91 80 4111 7004
Fax: +91 80 4112 7053
officeindia@fundermax.biz
www.fundermax.at

JAGO AG
Industriestrasse 21
CH-5314 Kleindöttingen
Tel.: +41 (0)56-268 81 31
Fax: +41 (0)56-268 81 51
info@jago.ch
www.jago.ch

ISOVOLTA S. A.U
Avda. Salvatella, 85-97
Poligono Industrial Can Salvatella
E-08210 Barberà del Vallès (Barcelona)
Tel.: +34-937 297 550
Fax: +34-937 190 511
info@isovolta.es
www.isovolta.es

ISO-MAX Spółka Akcyjna
ul. Rybitwy 12
PL-30 722 Krakau
Tel.: +48-12-65 34 528
Fax: +48-12-65 70 545
biuro@iso-max.com.pl
www.iso-max.com.pl

FUNDERMAX®

FunderMax GmbH
Klagenfurter Straße 87-89
A-9300 St. Veit/Glan

Tel.: +43 (0)5/9494-0
Fax: +43 (0)5/9494-4200
office@fundermax.at
www.fundermax.at

Ein Unternehmen der *Constantia* INDUSTRIES AG

exterior

Hexa surface

skid-resistant
weather-resistant
environmentally friendly
strong


for
people
who
create



The Hexa surface for Max Exterior panels

Quality

Max Exterior panels are duromer high-pressure laminates (HPL) in accordance with EN 438-6, type EDF, which are produced in laminate presses under great pressure and at high temperatures. Double-hardened acrylic polyurethane resins make for highly effective weather protection which is especially well-suited to permanent applications. Max Exterior panels bear the CE label required for construction applications.

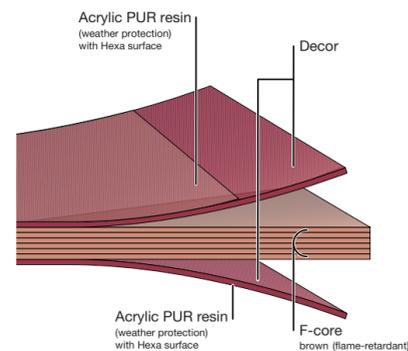

Structure of Max Exterior panel with Hexa surface



Close-up view of Hexa surface

Product characteristics

- NH top (Hexa NT surface)
- NT bottom
- brown core (F-quality)
- NH skid-resistance: R 10 as defined by DIN 51130
- XL format = 4,100 x 1,850 mm
- thickness: 6–20 mm (depending on structural requirements)

Decorative and durable

FUNDERMAX®

A variety of décors

Planners and builders can choose from numerous décors. For the Hexa surface, all solid colours, creative décors and wood décors from the Max Exterior Collection are available. The variants of the Authentic décor series are also available with the Hexa surface.



Used as skid-resistant flooring (boathouse, lake resort) and docks



Used in the restoration of stairways, patios and docks



Used on a platform for seating

Advantages

- durable, high-quality construction product
- skid-resistant surface thanks to special texture
- strong
- high degree of rigidity permits distances of subconstruction up to 800 mm
- weather-resistant
- frost-resistant
- environmentally friendly
- easy to work with
- decorative
- both visible and hidden fastenings possible
- no minimum order

Installation instructions and sub-constructions can be found in our "Exterior Technique" brochure.

Impressive in every situation

FUNDERMAX®

Applications

For use either in horizontal, walkable areas such as

balcony floors

on metal or wood sub-constructions for new balconies, or for the restoration of existing balconies (removal of the old sub-construction is unnecessary in most cases)

patios, recessed balconies, stairways, platforms, outdoor dining areas, docks

easy to install
mostly on wood sub-constructions

or for vertical surfaces such as

ventilated facades

with an unusual, interesting texture

wall cladding

In all cases, either bottom-ventilation or back-ventilation must be ensured.



Used as patio flooring



Used as balcony floor panel